

Table Of Contents

- [Infoprint 60 Printer \(3160-002\)](#)
 - [Printable Area](#)
 - [Media Specifications](#)
 - [Attachments](#)

[Previous Page](#) | [Next Page](#) [Contents](#) [Glossary](#) [Index](#) [IBM Supported Printers](#) >

Infoprint 60 Printer (3160-002)

This section describes Infoprint 60 printer characteristics. The Infoprint 60 printer is a cutsheet printer that uses laser and electrophotographic technology to print text, images, graphics, and bar codes at up to 60 impressions per minute.

[Figure 77. Infoprint 60 Printer](#)



[Table 217](#) summarizes the printer characteristics for the Infoprint 60 printer.

[Table 217. Infoprint 60 Printer Characteristics](#)

Printer Characteristic	Characteristic Value Infoprint 60 Printer
------------------------	--


Maximum printing rate	60 pages per minute
Print technology	Laser
Datastreams	IPDS and PCL
Form type	Cut Sheet
Number of input bins	Standard: Three bins, one with up to 2000 sheets and two bins with up to 500 sheets each
	Optional: One bin with up to 2000 sheets
Number of output bins	Standard: Output tray up to 1500 sheets; top output tray up to 500 sheets
	Optional: 3000-sheet stacker with convenience stapler
Finisher Attachments	
Corner staple	yes
Edge staple	yes
Side Staple	yes
Saddle	yes
Z-Fold	yes
Insertter	yes
Manual forms feed	no
Envelope printing	no
MICR printing *IBM Business Partners may have MICR solutions for this printer.	no*
Duplex printing	yes
Color	no
Adjust print-quality levels	no
Print resolution	240 dots-per-inch 300 dots-per-inch 600 dots-per-inch
Maximum impressions per month (duty cycle)	750,000

[Previous Page](#) | [Next Page](#) [Contents](#) [Glossary](#) [Index](#) [IBM Supported Printers](#) > [Infoprint 60 Printer \(3160-002\)](#) >

Printable Area

Although the Infoprint 60 printer can print to the edge of the paper, for best results, limit printing to within .24 inch (6 mm) of all edges of the sheet. Printing any closer to the edges of the sheet may result in degraded print quality and loss of characters. [Figure 78](#) shows an example of the printable area of a sheet for a Infoprint 60 printer. The printable area shown is 8.02 by 10.52 inches.

[Figure 78. Recommended Printable Area for an 8.5 x 11 Inch Sheet on the Infoprint 60 Printer](#)

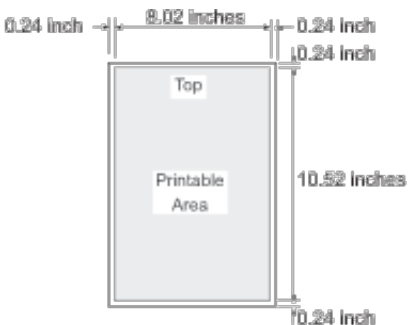

[Previous Page](#) | [Next Page](#) [Contents](#) [Glossary](#) [Index](#) [IBM Supported Printers](#) > [Infoprint 60 Printer \(3160-002\)](#) >

Media Specifications

The Infoprint 60 printer accepts the following media:

Media types:

Plain or letterhead cutsheet paper, paper or polymer-based adhesive labels suitable for electrophotographic printing, pre-printed forms and letterheads, perforated and pre-punched (2, 3, and 4 holes) xerographic papers

Sheet sizes:

Letter (8.5 inches x 11 inches), A4 (210 mm x 297 mm), Legal (8.5 inches x 14 inches), A3 (297 mm x 420 mm), Ledger (11 inches x 17 inches), B4 (257 mm x 364 mm), B5 (182 mm x 257 mm), non-standard paper sizes from 7.48 inches x 7 inches (190 mm x 178 mm) through 11.69 inches x 17 inches (297 mm x 432 mm)

Media weights:

17 lb. to 42 lb. (64 gsm to 160 gsm); 110 lb. index (200 gsm) - letter and A4, simplex only; notebook divider tabs, 90 lb. to 110 lb. weights

[Previous Page](#) | [Next Page](#) [Contents](#) [Glossary](#) [Index](#) [IBM Supported Printers](#) > [Infoprint 60 Printer \(3160-002\)](#) >

Attachments

Host software support for Infoprint 60 printer attachments are listed below.

Table 218. Attachments for the Infoprint 60 Printer

Platform	370 Channel Feature 4020	Token-Ring SNA Feature 4120	Token-Ring TCP/IP Feature 4120	Ethernet TCP/IP Feature 4162
PSF/MVS	Yes	Yes	Yes	Yes
PSF for OS/390	Yes	Yes	No	No
PSF/VSE	Yes	Yes	No	No
PSF/VM	No	Yes	Yes	Yes
PSF/400	No	No	Yes	Yes
PSF/AIX	No	No	Yes	Yes
PSF/2	No	No	Yes	Yes
Infoprint Manager	No	No	Yes	Yes